

ARSET

Applied Remote Sensing Training

<http://arset.gsfc.nasa.gov>




@NASAARSET

NASA Satellites and Earth System Models for Water Resources Management

Outline


- Water Resources Management
- Overview of Satellites & Earth Science Models for Water Resources Management
- Satellites & Sensors
- Earth System Models
- Data Applications



Water Resources Management

Water Resources Management

- For sustainable water management, it is critical to have accurate estimates of water cycle components

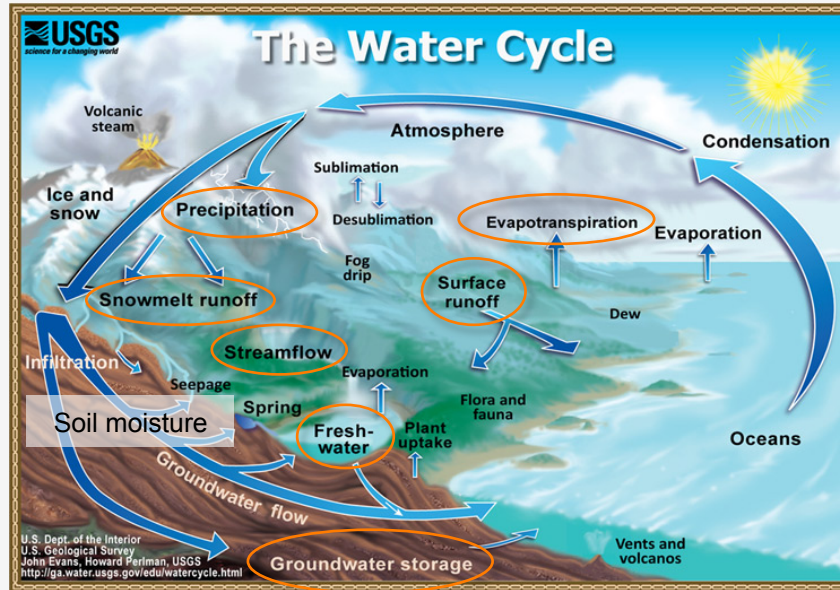

USGS

Water Resources Management

Freshwater Components

Over a watershed, river basin, or region:

- Precipitation (rain, snow) is the main source of fresh water
 - Other regional contributions: runoff/streamflow, lakes, soil moisture, and ground water
- Evaporation and evapotranspiration through loss of water to atmosphere and runoff outflow contribute to depletion of fresh water
- Surface fresh water availability (W) is largely controlled as follows:

$$W = (\text{precipitation} + \text{runoff in the region}) - (\text{evaporation/} \\ \text{evapotranspiration} + \text{runoff outflow} + \text{infiltration})$$

Freshwater Information

- Not all water cycle components can easily be measured directly, such as:
 - Evapotranspiration
 - Runoff
 - Water vapor transport
- NASA satellites and Earth system models measure and calculate all water cycle components

A satellite map of a region in Colombia, showing a semi-transparent overlay with the title. The map displays a river network, forested areas, and various towns. The title is centered in the overlay, with a horizontal line below it.

Overview of Satellites & Earth Science Models for Water Resources Management

NASA Satellites & Earth System Models

Hourly, Daily, Seasonal, and Multi-Year Time Scales

Useful for water resources management & for hydrology model inputs

- Rain
 - Temperature
 - Humidity
 - Winds
 - Soil Moisture
 - Snow/Ice
 - Clouds
 - Terrain
- Ground Water
 - Vegetation Index
 - Evapotranspiration
 - Runoff

From satellites and models

From satellite observations

From atmosphere-land models that
assimilate satellite observations

Satellites & Sensors



NASA Satellites for Water Resources Monitoring




- Landsat: 07/1972-present
- Tropical Rainfall Measuring Mission (TRMM): 11/1997-present
- Global Precipitation Measurements (GPM): 2/2014-present
- Terra: 12/1999-present
- Aqua: 5/2002-present
- Soil Moisture Active Passive (SMAP): 1/2015-present
- Gravity Recovery and Climate Experiment (GRACE): 3/2002-present

NASA Satellites for Water Resources Monitoring

- Each satellite carries one or more sensors or instruments with specific spectral channels to observe geophysical quantities
 - This presentation will describe sensors most useful for water resources data
- Landsat: 07/1972-present
 - TRMM: 11/1997-present
 - GPM: 2/2014-present
 - Terra: 12/1999-present
 - Aqua: 5/2002-present
 - SMAP: 1/2015-present
 - GRACE: 3/2002-present

Landsat Satellites and Sensors

<http://landsat.gsfc.nasa.gov>

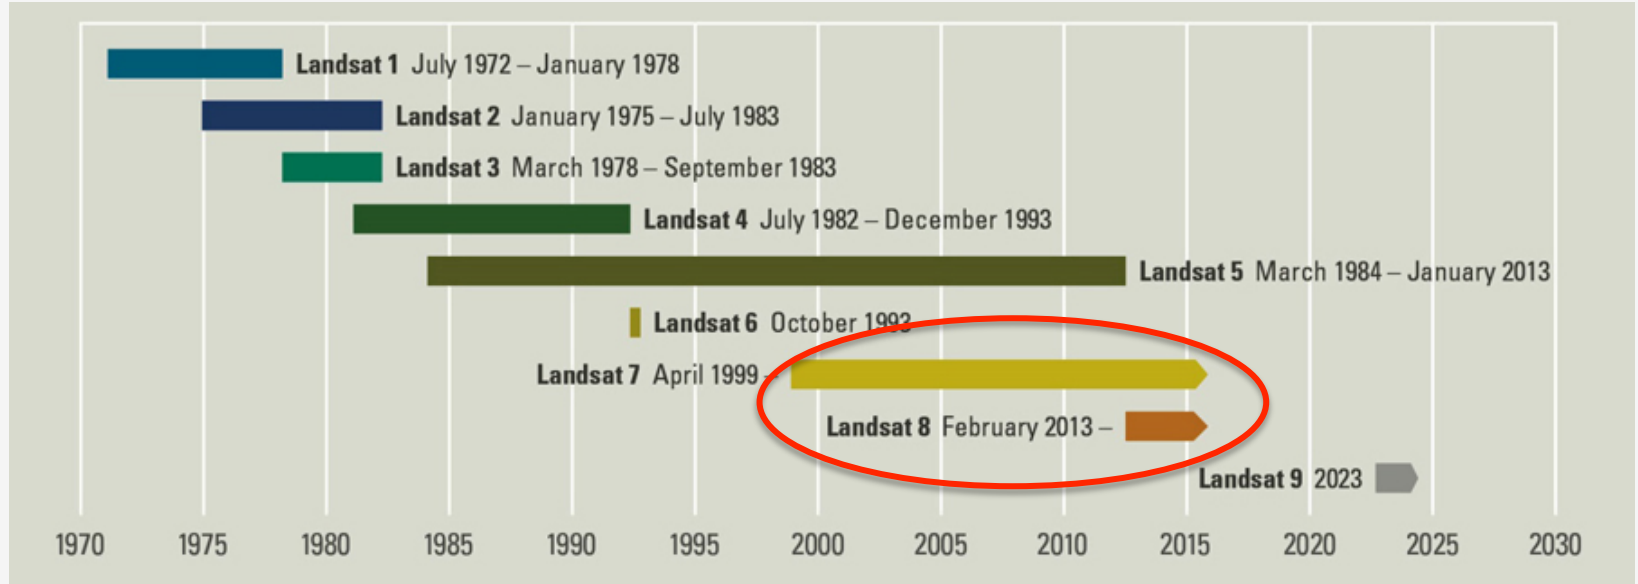

From: http://landsat.usgs.gov/about_mission_history.php


Enhanced Thematic Mapper (ETM+)

<http://geo.arc.nasa.gov/sge/landsat/l7.html>

- Onboard Landsat-7
- Polar orbiting satellite
- Spatial Coverage and Resolution:
 - Global, Swath: 185km
 - Spatial Resolution: 15m, **30m**, 60m
- Temporal Coverage and Resolution:
 - April 15, 1999-present
 - 16-day revisit time

Spectral Bands

- 8 bands (blue-green, green, red, reflected & thermal IR, panchromatic)
 - Bands 1-5, 7: 30m
 - Band 6: 60m
 - Band 8: 15m

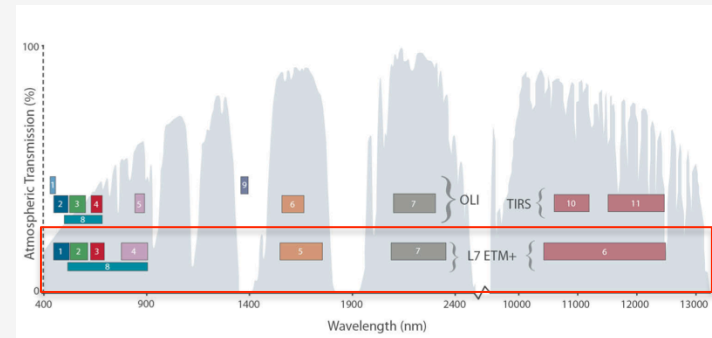

NASA


Operational Land Imager (OLI)

<http://landsat.usgs.gov/landsat8.php> ; <http://landsat.gsfc.nasa.gov/?p=5779>

- Onboard Landsat-8
- Polar orbiting satellite
- Spatial Coverage and Resolution:
 - Global, Swath: 185km
 - Spatial resolution: 15m, **30m**
- Temporal Coverage and Resolution:
 - Feb 11, 2013 – present
 - 16-day revisit time

Spectral Bands

- 9 bands (blue-green, green, red, near IR, shortwave and thermal IR)
 - Bands 1-7, 9: 30m
 - Band 8: 15m

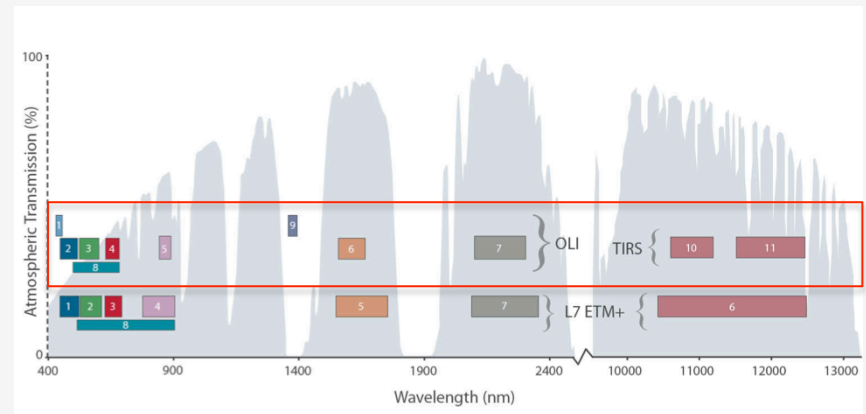


TRMM Satellite & Sensors

<http://trmm.gsfc.nasa.gov>

- In a non-polar, low-inclination orbit
- Altitude of approximately 350km, raised to 403km after Aug 23, 2001
- Spatial Coverage
 - 16 TRMM orbits a day covering global tropics between 35°S – 35°N latitude
- Revisit Time: 11-12 hrs
 - Time of observation changes daily
- Sensors:
 - TMI
 - LIS
 - PR
 - CERES
 - VIIRS


TRMM Orbits

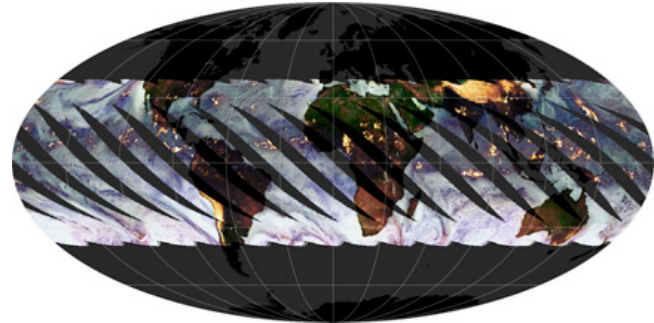

TRMM Microwave Imager (TMI)

<http://pmm.nasa.gov/TRMM/TMI>

- Spatial Coverage and Resolution:
 - Coverage: -180° - 180° , 35° S- 35° N
 - Swath: 760km (878km after 8/2001)
 - Vertical Resolution:
 - 0.5 km from surface – 4 km
 - 1.0 km from 4-6 km
 - 2.0 km from 6-10 km
 - 4.0 km from 10-18 km
- Temporal Coverage and Resolution:
 - Nov 27, 1988 – Oct 7, 2014
 - 16 orbits per day

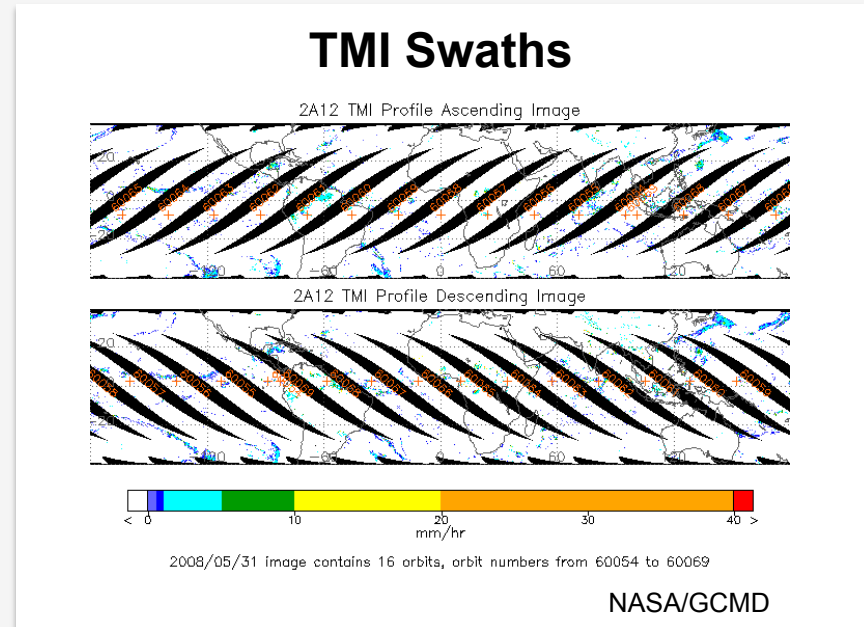

Channel Frequencies


- 10.7, 19.4, 21.3, 37, 85.5 GHz

Precipitation Radar (PR)

<http://pmm.nasa.gov/TRMM/PR>

- Spatial Coverage and Resolution:
 - Coverage: 35°S-35°N
 - Swath: 215km (247 after 8/2001)
 - Spatial Resolution: 4.3km (5km)
 - Vertical Resolution: 250m (from 0-20km)
- Temporal Coverage and Resolution:
 - Nov 27, 1998 – Oct 7, 2014
 - ~16 orbits per day
- Frequency:
 - 13.6 GHz

PR Swaths

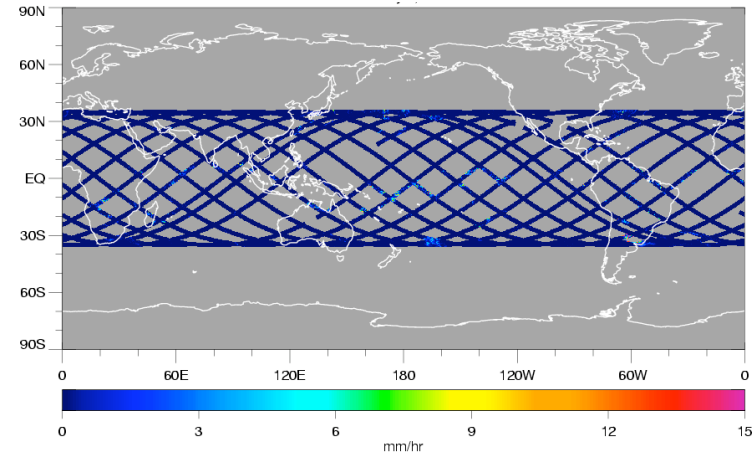


Kummerow, C., et. al, 1998: The tropical rainfall measuring mission (TRMM) sensor package, J. Atmos. Oceanic Technol., 15, 809-817.

GPM Satellite & Sensors

<http://pmm.nasa.gov/GPM>

- GPM core satellite is in a non-polar, low inclination orbit
 - Altitude: 407km
- Spatial Coverage:
 - 16 orbits a day covering global tropics, between 65°S-65°N
- Along with constellation of satellites, GPM has a revisit time of 1-2 hrs over land
- Sensors:
 - GMI
 - DPR


GPM Core Satellite Launched Feb 27, 2014

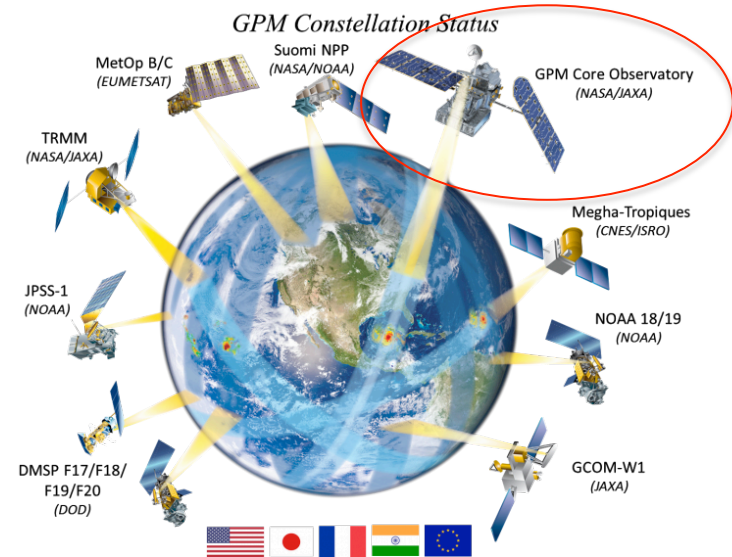

GPM Microwave Imager (GMI)

<http://pmm.nasa.gov/GPM/flight-project/GMI>

- Spatial Coverage and Resolution:
 - Coverage: -180°-180°, 65°S-65°N
 - Swath: 885km
 - Spatial Resolution: 4.4-32km
 - Vertical Resolution:
 - 0.5 km from surface – 4 km
 - 1.0 km from 4-6 km
 - 2.0 km from 6-10 km
 - 4.0 km from 10-18 km
- Temporal Coverage and Resolution:
 - Feb 2014 – present
 - ~2-4 hr observations

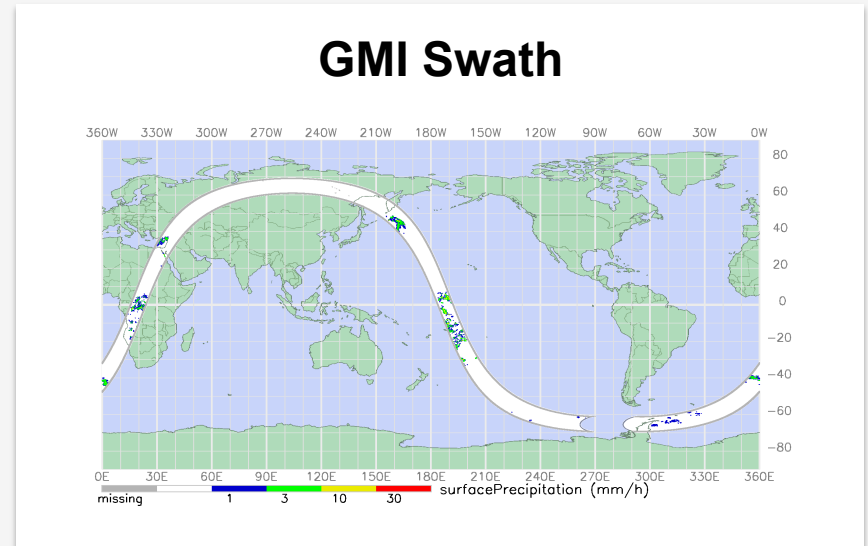

Channel Frequencies:


- 10.6, 18.7, 23.8, 36.5, 89, 166, 183 GHz

Dual Precipitation Radar (DPR)


<http://pmm.nasa.gov/GPM/flight-project/DPR>

- Spatial Coverage and Resolution:
 - Coverage: -180° - 180° , 65° S- 65° N
 - Swath: 120km (Ka) and 245km (Ku)
 - Spatial Resolution: 5.2km
 - Vertical Resolution: 250m (from 0-20km)
- Temporal Coverage and Resolution:
 - Feb 27, 2014 – present
 - ~2-4 hr observations
- Frequency:
 - 13.6 and 35.5 GHz

DPR Swaths Ka 35.5 GHz

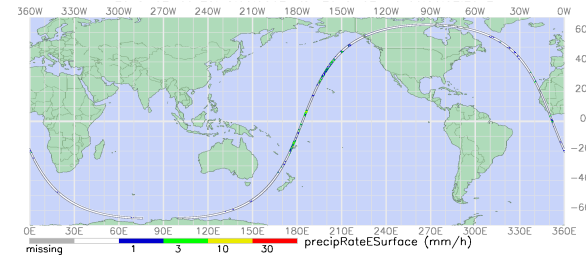


Ku 13.6 GHz

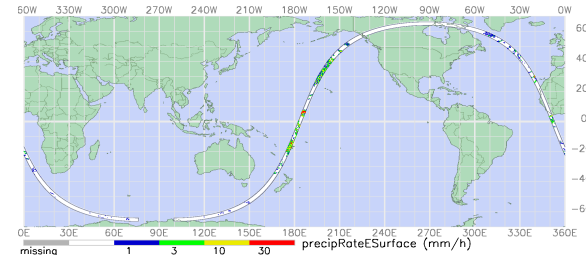

Terra and Aqua


Terra

- Polar orbit, 10:30 a.m. equator crossing time
- Global coverage
- December 18, 1999 – present
- 1-2 observations per day
- Sensors:
 - ASTER, CERES, MISR, MODIS, MOPITT

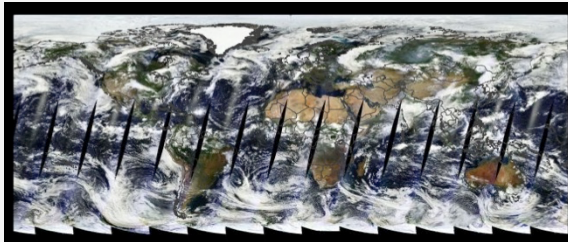

Aqua

- Polar orbit, 1:30 p.m. equator crossing time
- Global coverage
- May 4, 2002 – present
- 1-2 observations per day
- Sensors:
 - AIRS, AMSU, CERES, MODIS, AMSR-E

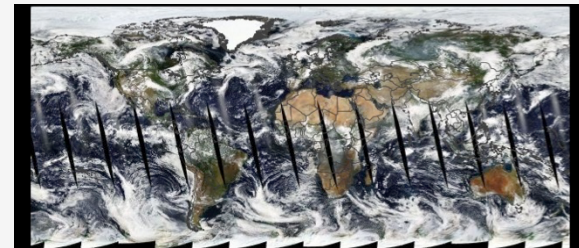


MODerate Resolution Imaging Spectroradiometer (MODIS)

<http://modis.gsfc.nasa.gov>

- On-board Terra and Aqua
- Designed for land, atmosphere, ocean, and cryosphere observations
- Spatial Coverage and Resolution:
 - Global, Swath: 2,330km
 - Spatial Resolution Varies: 250m, 500m, 1km
- Temporal Coverage and Resolution:
 - 2000-present, 2 times per day

Spectral Bands

- 36 bands (red, blue, IR, NIR, MIR)
 - Bands 1-2: 250m
 - Bands 3-7: 500m
 - Bands 8-16: 1000m

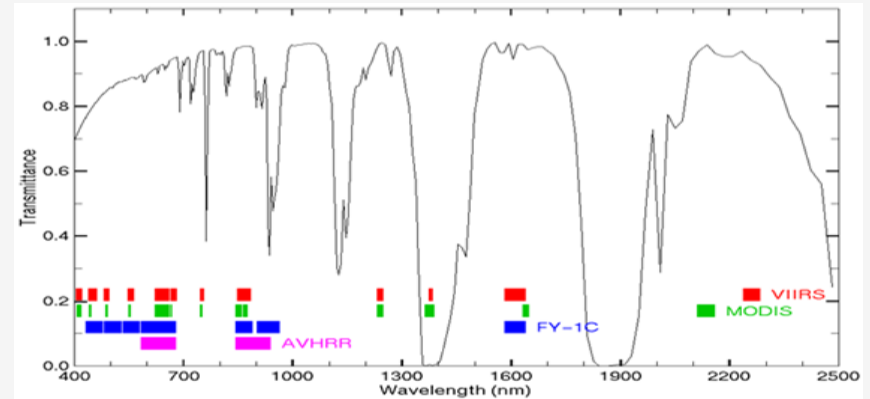


cimss.ssec.wisc.edu

SMAP Satellite & Sensors

<http://smap.jpl.nasa.gov>

- Polar Orbit
 - Altitude: 685km
- Spatial Coverage:
 - Global
- Temporal Coverage:
 - January 31, 2015 – present
- Sensors:
 - Microwave Radiometer
 - Microwave Radar (not currently available)

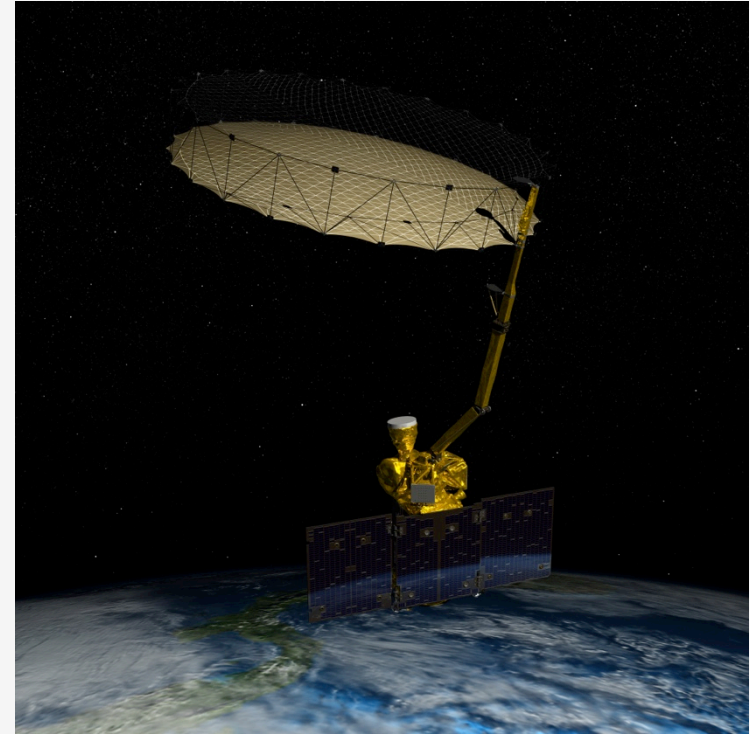


SMAP Microwave Radiometer and Radar

<http://smap.jpl.gov/observatory/instrument>

- Spatial Coverage and Resolution:
 - Global
 - Radiometer Swath: 1,000km
 - Resolution: 30km
- Temporal Resolution:
 - 8-day revisit time (6 a.m./p.m. observation time)
- Designed to work as Synthetic Aperture Radar (SAR) with 3km spatial resolution
 - Stopped operating after Jul 7, 2015
- Radiometer frequency: 1.41 GHz
- Radar frequency: 1.26 GHz


SMAP Swath

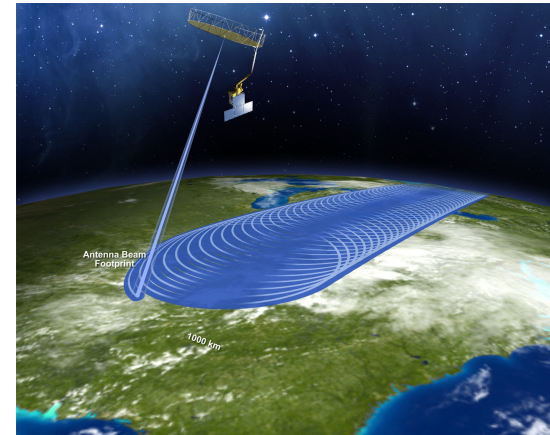


GRACE Satellite & Sensors

<http://www.jpl.nasa.gov/missions/details.php?id=5882>

- Polar, sun-synchronous orbit
- Twin satellite mission
- Spatial Coverage and Resolution:
 - Global
 - Resolution: 150,000 km²
- Temporal Coverage and Resolution:
 - March 17, 2002 – present
 - 250 gravity profiles per day
- Sensors:
 - Microwave k-band ranging instrument
 - Accelerometers
 - Global Positioning System Receivers

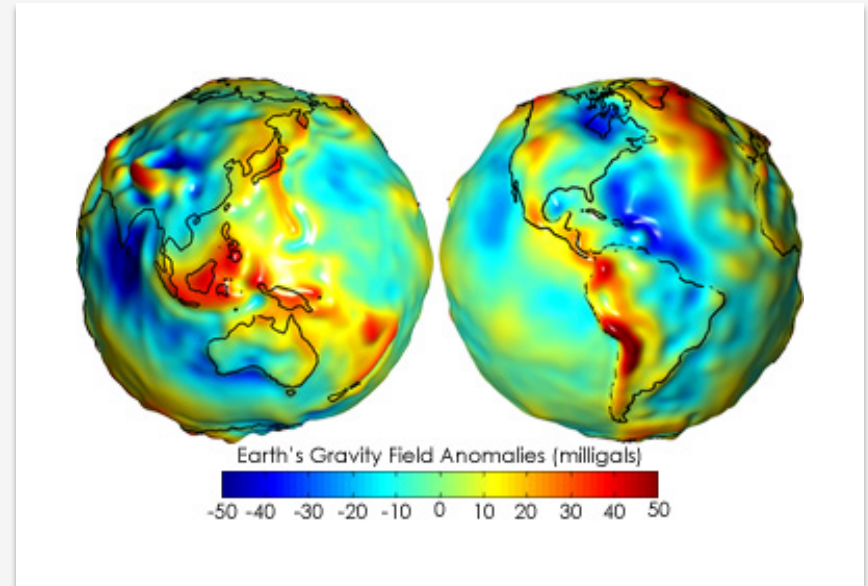

Earth System Models

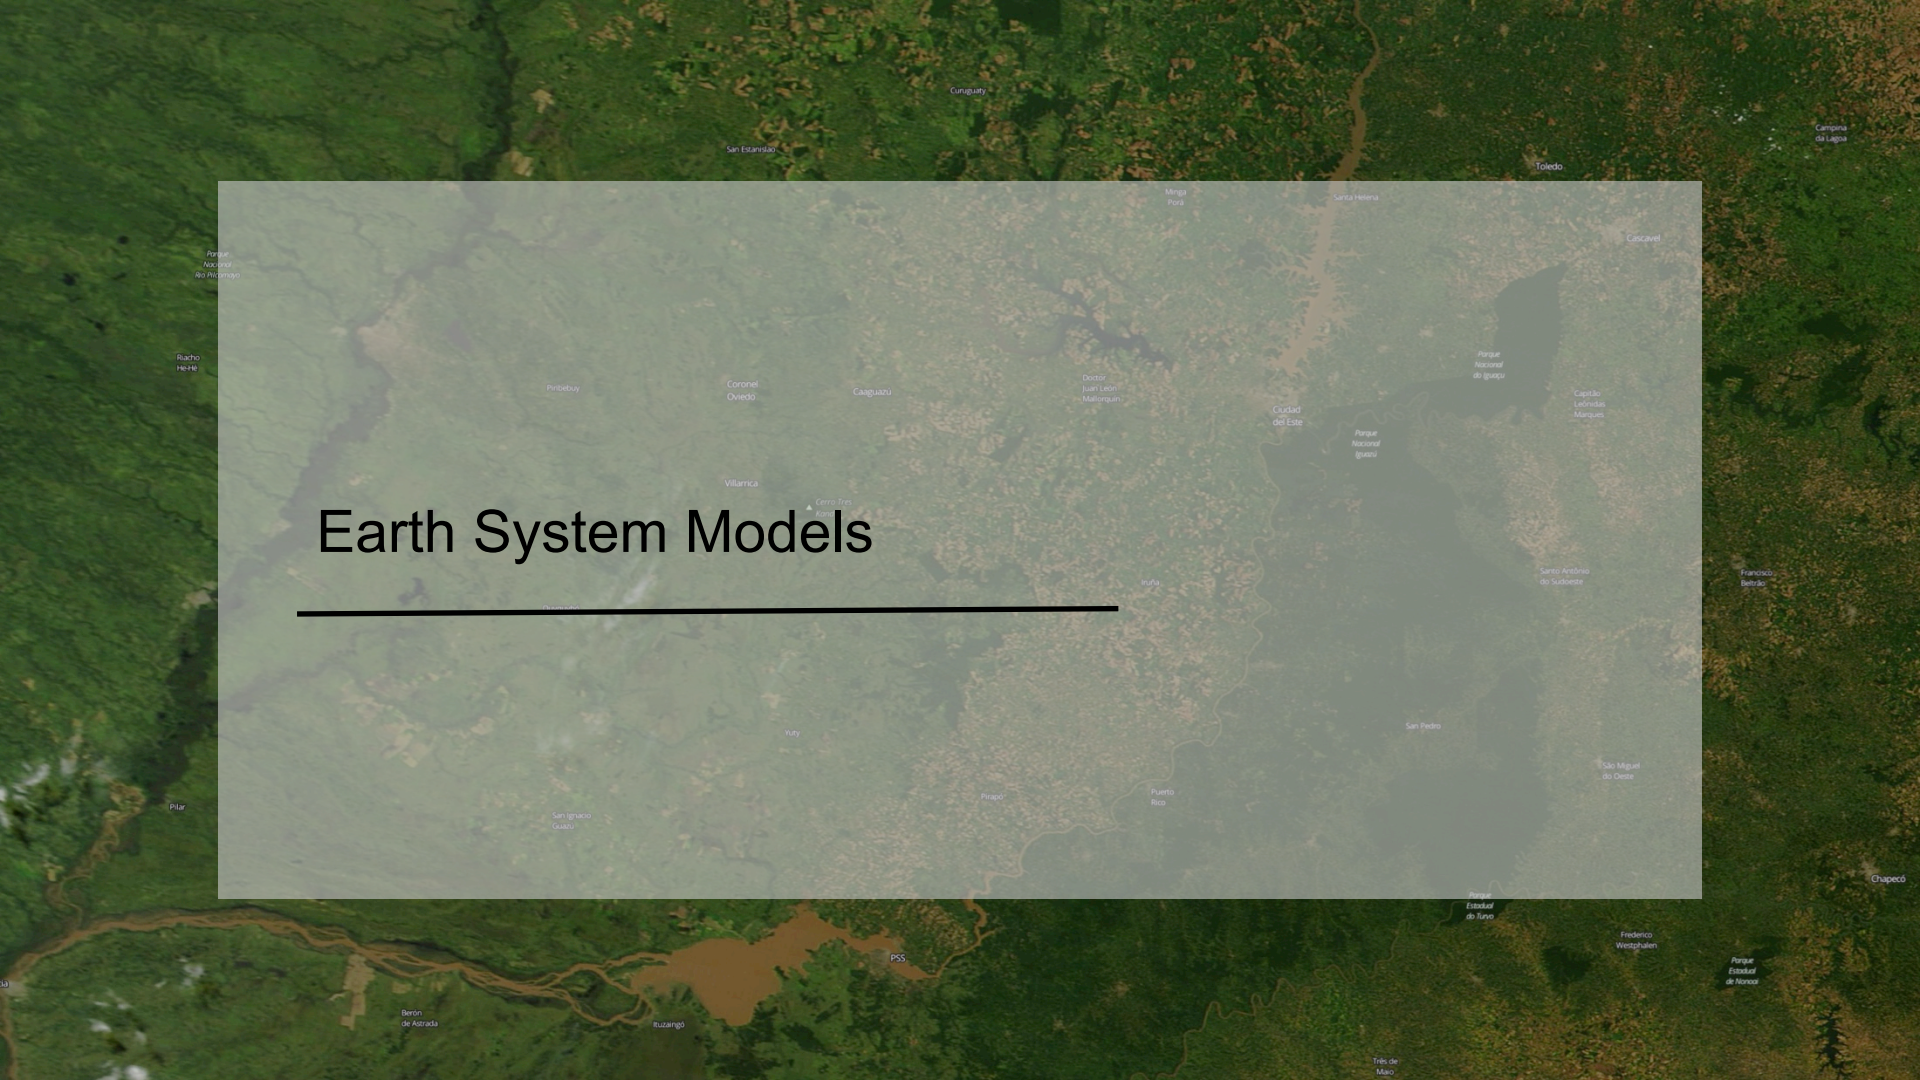

Parque Nacional
del Palmar

Rio
Hehe

Pilar

Barron
de Astrada

Ruzang

PSS

Cumagut

San Estanislao

Toledo

Campana
de Luján

Cancun

Piribebuy

Coronel
Oviedo

Campesino

Doctor
Juan León
Marín

Ciudad
del Este

Parque
Nacional
de Iguazú

Capitán
Leónidas
Marín

Villarrica

Cerro Tres
Cerro

Yuty

Santo Antonio
de Surubare

Francisco
Beltrán

Yuty

San Pedro

San Miguel
de Dora

San Ignacio
Queiro

Pirapó

Puerto
Rico

Chaparral

Parque
Estadual
de Itaipu

Frederico
Westphalen

Parque
Estadual
de Itaipu

Trova de
Mato

Earth System Models Provide Value-Added Information

Remote Sensing + Surface Observations + Numerical Models

Satellite Data




NASA

Surface Measurements
and In-Situ Data



NASA

Numerical Models



NOAA

NASA Models Useful for Water Resources Management

Atmosphere-Ocean-Land Models

- GEOS-5:
 - The Goddard Earth Observing System Version 5
- MERRA:
 - Modern Era Retrospective-Analysis for Research and Application
- GLDAS:
 - Global Land Data Assimilation System

Global & North American Land Data Assimilation Systems

<http://ldas.gsfc.nasa.gov>

- Integrates ground and satellite observations within numerical models to produce consistent, high resolution fields of land surface states and fluxes
- Uses data from MODIS, TRMM, GOES
- GLDAS and a version of NLDAS use the Land Information System (LIS) with different sources of inputs
 - Meteorological Analysis
 - Surface Solar Radiation
 - Precipitation
 - Soil Texture
 - Vegetation Classification and Leaf Area Index
 - Topography
- Integrated Output for Water Resources
 - Soil Moisture
 - Evapotranspiration
 - Surface/Sub-Surface Runoff
 - Snow Water Equivalent

| Satellites and Models

| Freshwater Components

- Rain Amount (TRMM, GPM)
- Snow Cover (Terra and Aqua MODIS)
- Soil Moisture (SMAP, GLDAS)
- Evapotranspiration (Terra and Aqua MODIS, Landsat, GLDAS)
- Runoff/Streamflow (TRMM, GPM, GLDAS)

Data Applications

Water Resources: Satellite Data Applications

Crucial Freshwater Components

Water Allocation

- Water Budget

Agricultural & Irrigation Management

- Precipitation
- Soil Moisture
- Evapotranspiration

Flood & Drought Management


- Precipitation
- Runoff/Streamflow
- Soil Moisture
- Evapotranspiration
- Groundwater

Reservoir & Dam Management

- Reservoir Height
- Precipitation
- Runoff/Streamflow

Monitoring Water Balance in the Nile Basin



NASA Observations and Modeling Systems Capabilities

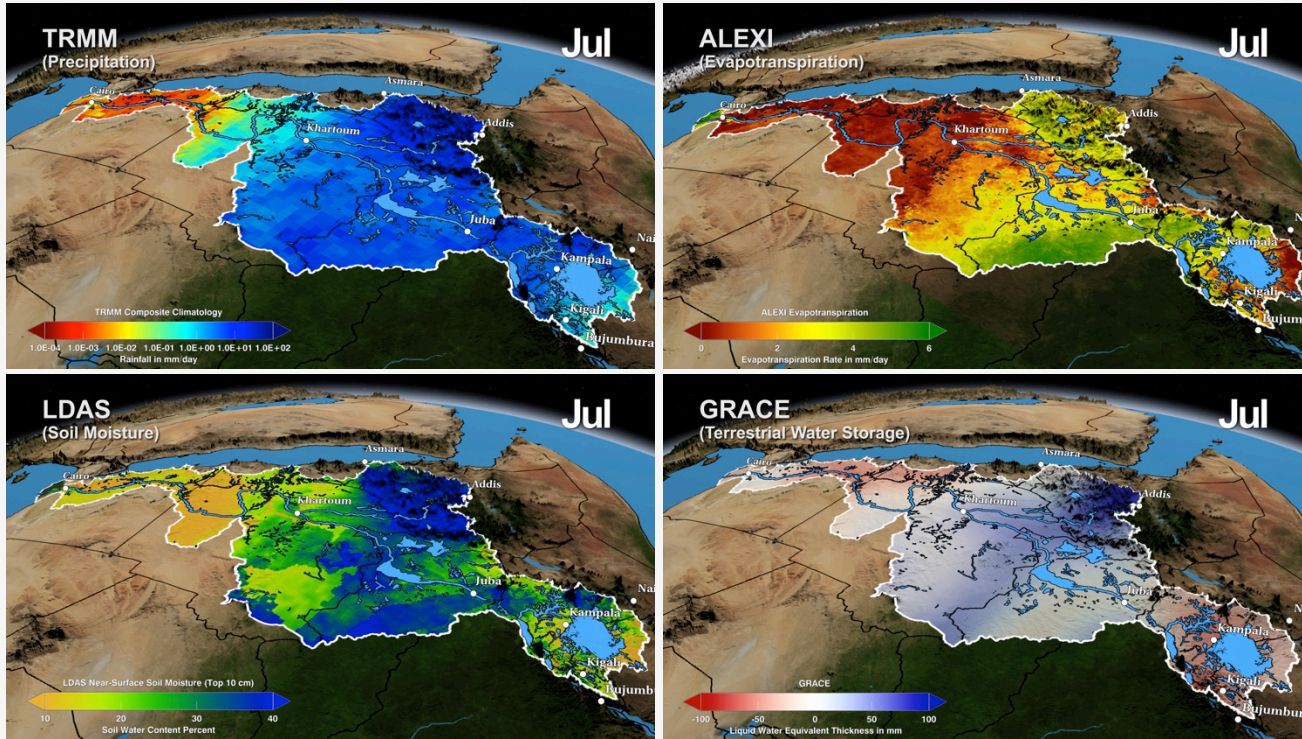

Applied Sciences Project Scientist: Ben Zaitchik (Johns Hopkins University)

Scale Water Balance in the Nile Basin


Based on TRMM, ALEXI, LDAS, and GRACE

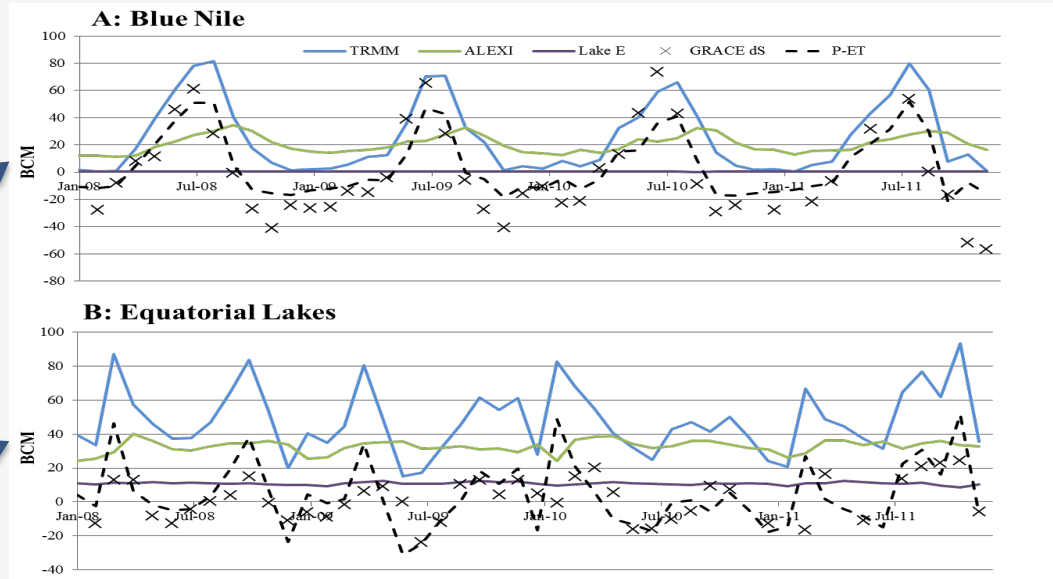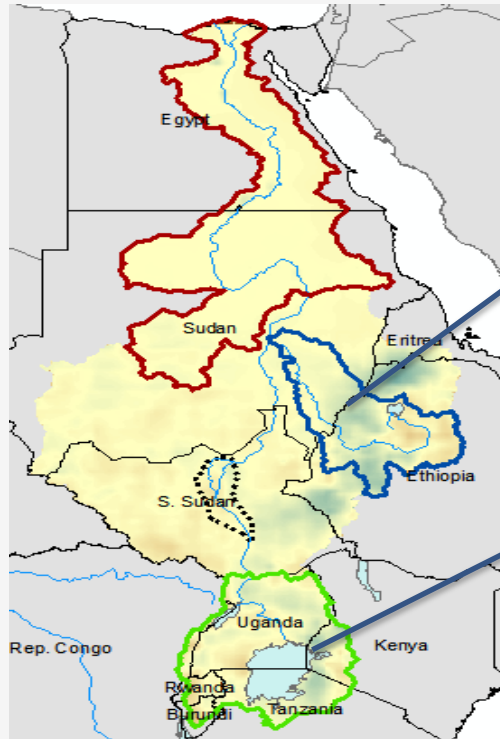


Courtesy of: Ben Zaitchik (Johns Hopkins University)

Irrigation Management Using Satellite-Based ET

Based on the Terrestrial Observation and Prediction System (TOPS)

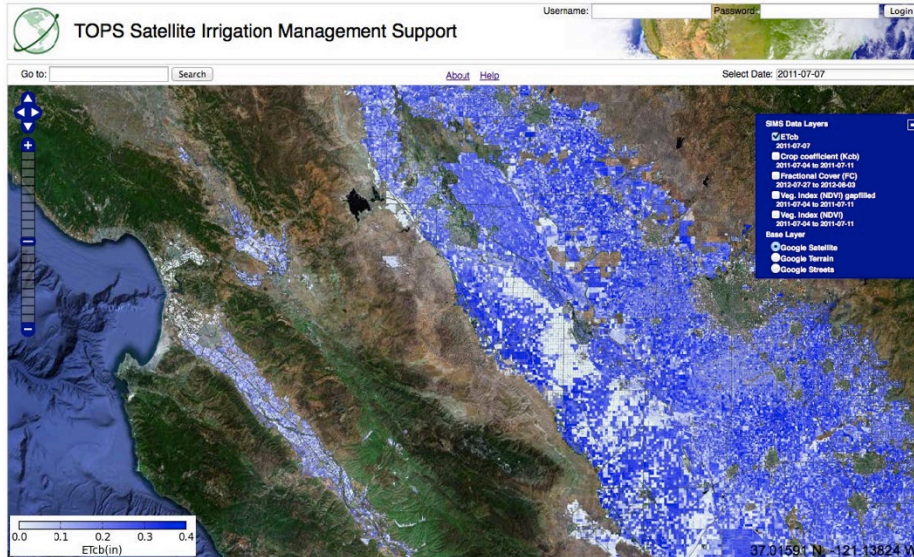


<http://ecocast.arc.nasa.gov/dgw/sims>

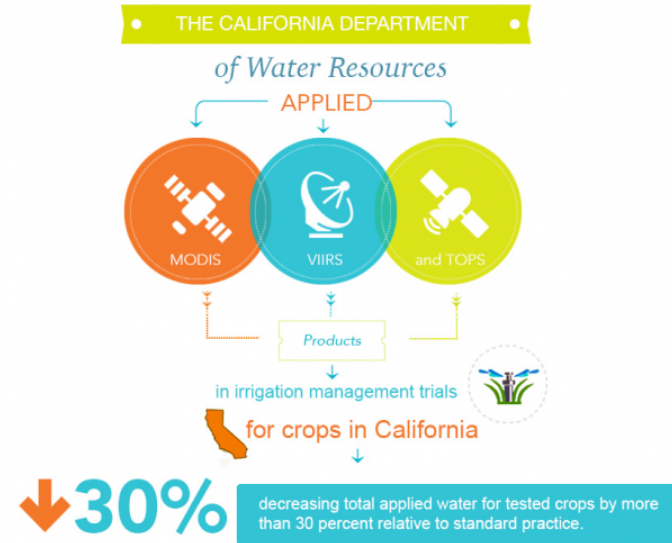

Courtesy of: Forest Melton, NASA ARC-CREST/California State University

Drought Monitoring Decision Support Tool for the Navajo Nation

Based on TRMM and GPM

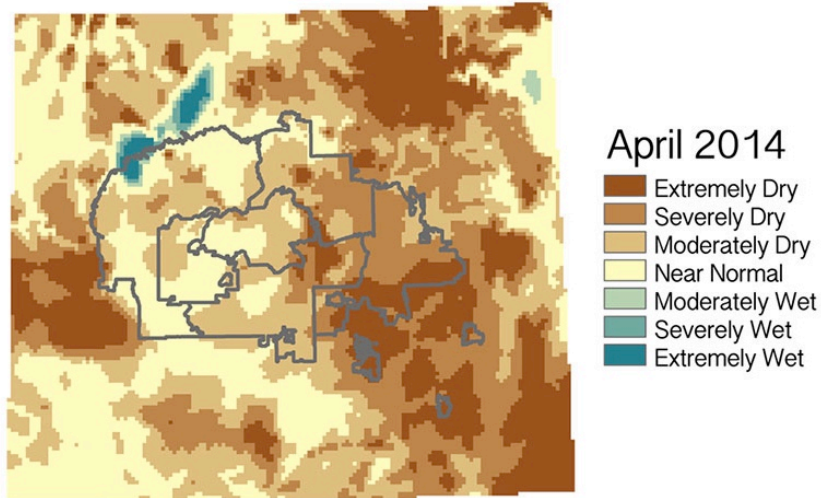


A Drought Monitoring Decision Support Tool for Customized Calculation of a Standardized Precipitation Index Value in the Navajo Nation, 2015 DEVELOP project. Based on precipitation indexes from TRMM and GPM.

- The Navajo Nation has been impacted by
 - Severe droughts
 - Lack of domestic water infrastructure
 - Lack of economic resources
- Roughly 1/3 of population are without access to potable water in their homes
- Created geodatabase of historical climate information specific to the area

National Drought Mitigation Center (NDMC)

Based on GRACE

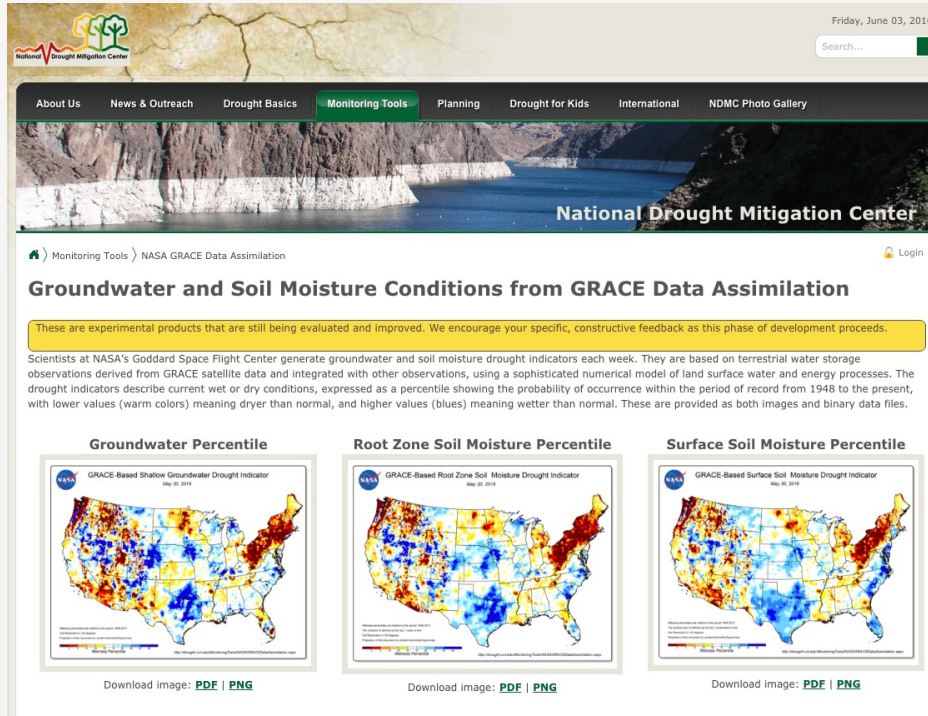


- Combines GRACE measurements of water storage with meteorological data
- Generates groundwater and soil moisture percentile maps
- 1948-present

<http://drought.unl.edu/MonitoringTools/NASAGRACEDataAssimilation.aspx>

Extreme Precipitation, Relative Soil Moisture, & Flood Detection



Based on GPM and Global Flood Monitoring System (GFMS)

2015 South Carolina Flooding

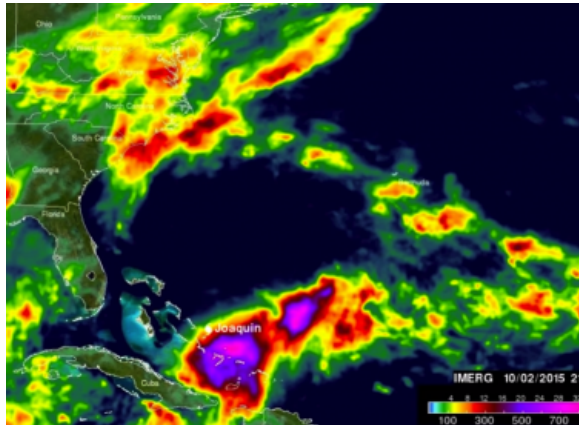


GPM/IMERG

0–10 cm Relative Soil Moisture (available water; %) valid 00z 05 Oct 2015
Precipitation in previous hour (1,2,5,10,15,20,25 mm contours)

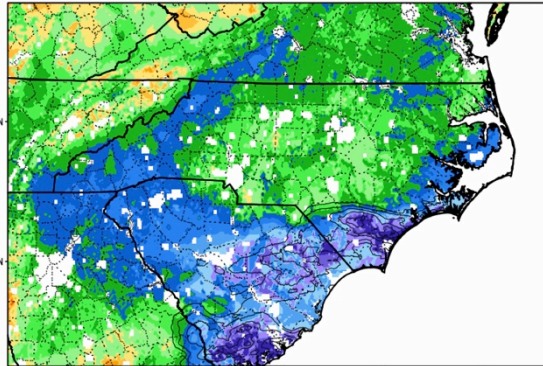


GFMS

Flood Detection/Intensity (depth above threshold [mm])
12Z05Oct2015

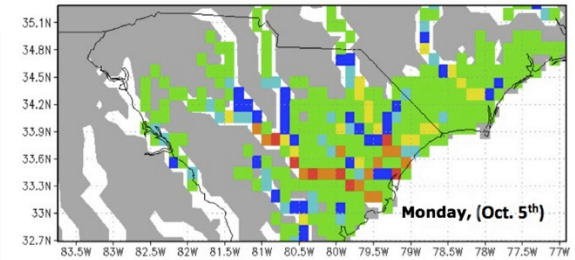

Flood Detection/Intensity (depth above threshold [mm])
12Z06Oct2015

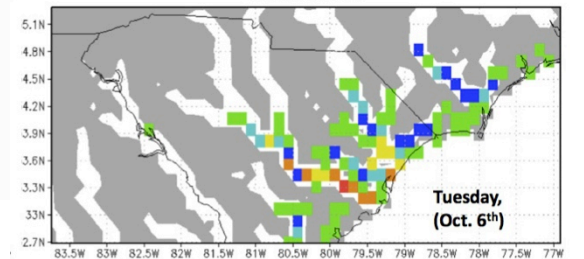

GFMS

Questions

1. Which satellite(s) carry the MODIS sensor?
2. Which satellite(s) carries dual precipitation radar?
3. The Landsat mission is a series of satellites starting in 1972? Which is the current Landsat mission?
4. Which satellite mission is useful for estimating ground water?

Next Presentation: NASA Web-based Tools for Water Resources Data Access